

DPF 6000 XRP



Vehicle wrapped by:
STICKER DODGE
DESIGNS
STICKERDODGE.COM

Vehicle Wrap Material with Enhanced Repositionability

DPF 6000XRP is a 2-mil gloss white cast film with bubble releasing, tinted, repositionable, permanent pressure-sensitive adhesive. The X-scape system allows installers to achieve speedy installation while maintaining high enough tack to ensure long term bond. Designed for large format graphics, DPF 6000XRP is made of premium quality cast face stock with a lay-flat liner. The adhesive system is designed to provide excellent opacity, as well as easy installation. The film provides superior conformability around rivets, curves, and contours. DPF 6000XRP is rated for outdoor durability up to 7 years (unprinted). Printed durability is dependent on the ink system used.

FEATURES

ADHESIVE

- Repositionable:** Adhesive allows applicators to “snap” graphics up with ease
- X-scape Technology:** Adhesive has channels embossed into it to allow air to egress away from high pressure areas (bubbles)
- Tint:** Adhesive is tinted giving the graphics block out capabilities
- Soft:** Adhesive is soft which causes the X-scape channels to eventually fill in giving the graphic maximum adhesion

TOTAL MEDIA

- Digitally Printable:** Print with a wide variety of direct print systems
- Screen Printable:** Media has lay-flat liner ideal for screen printing and will accept a wide range of screen print inks
- The Perfect Rivet:** Complete a rivet application without poking a hole but by simply pushing the air away from the rivet by touch and setting it with heat
- No Bubble Too Difficult:** With Arlon's X-scape Technology, trapped bubbles can be egressed by touch



Xscape
Technology

- Bubble Free
- Installer Friendly
- Permanent Adhesive

ARLON

The applications are endless...


USA: 2811 S. Harbor Blvd. - Santa Ana, CA 92704 - Tel: 800-854-0361 - Fax: 714-540-7190 - Technical Service: 877.275.6698

EUROPE: Badhuisweg 11 2587 CA Den Haag The Netherlands - Tel: +31 (0) 70 354-4311 - Fax: +31 (0) 70 355-7721

www.arlon.com

Xscape Technology Advantage

The random pattern of the air channels allow applicators to flatten air bubbles quickly and easily, even if the bubble is located in a deep channel! Applicators no longer need to poke holes around rivets to allow air to escape. Simply push the air away from the rivet and set the vinyl with heat. With no holes to open up over time, your rivet application will remain uncompromised for its full service life.

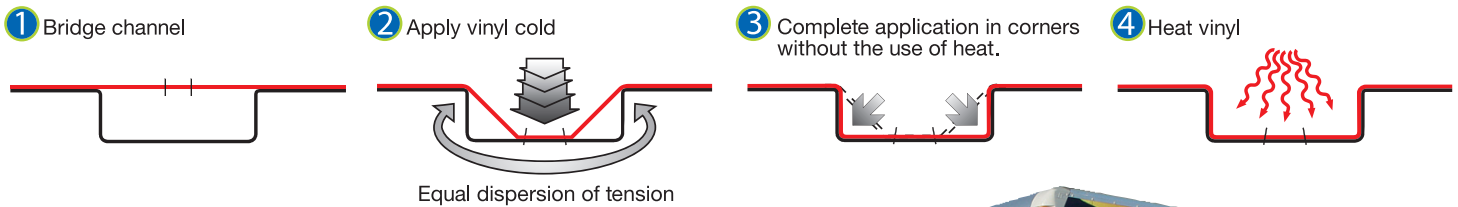

Vehicle wrap by:
DIGITAL
DESIGNS
Graphic Sign Solutions

- Bubble Free
- Installer Friendly
- Permanent Adhesive



PERFORMANCE AND PHYSICAL DATA

PREMIUM 2-MIL CAST FILM

Surface Finish:	Glossy 80-90%
Outdoor Durability:	7 Years (unprinted)
Roll Widths:	30", 48", 54" and 60"
Roll Lengths:	50 Yards
Adhesive:	Tinted, Permanent Pressure Sensitive, X-scape Technology
Optimal Application:	50°F to 90°F 10°C to 32°C (on clean, dry substrate)
Service Temperature Range:	-20°F to 150°F -29°C to 65°C (on clean, dry substrate)

ARLON

The applications are endless...

USA: 2811 S. Harbor Blvd. - Santa Ana, CA 92704 - Tel: 800-854-0361 - Fax: 714-540-7190 - Technical Service: 877.275.6698

EUROPE: Badhuisweg 11 2587 CA Den Haag The Netherlands - Tel: +31 (0) 70 354-4311 - Fax: +31 (0) 70 355-7721

www.arlon.com